

LEDVANCE® LED 星朗吸顶灯 第三代



产品应用:

- 卧室、餐厅、阳台
- 过道、出入口
- 超市卖场
- 办公楼


主要规格

直径	功率	光通量	色温	光效	IP 等级
255mm	10W	760 lm	3000K 4000K 6500K	76 lm/W	IP20
255mm	10W	1520 lm	3000K 4000K 6500K	76 lm/W	IP44
330mm	20W	1520 lm	3000K 4000K 6500K	76 lm/W	IP20

产品规格

LEDVANCE LED 星朗吸顶灯 第三代				
电器	功率 (W)	10W	20W	
	电压范围	220 - 240VAC		
	输入电流	110mA	220mA	
	频率	50/60Hz		
	功率因素	0.5		
	灯具等级	Class I		
光学	光效	760lm	1520lm	
	色温 (K)	3000K、4000K、6500K		
	显色性	>80		
	系统光效	76 lm/W		
	光束角	120°		
	LED 芯片	直下式透镜发光		
	使用寿命	15,000 hrs @ L70 (Ta=25°C)		
	使用环境温度	-20 - +40°C		
	存储环境温度	-20 - +70°C		
灯体	尺寸(直径*高 mm)	φ255*73	φ330*78	
	面罩材质	乳白色 PC		
	防护等级	IP20	IP44	IP20
	抗震等级	IK20		
	安装方式	吸顶式安装		

产品尺寸:

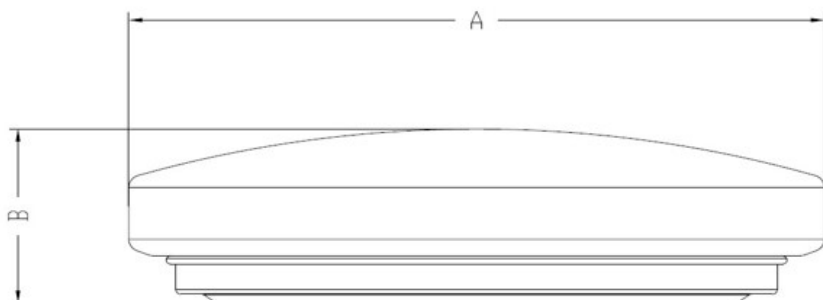

功率	A(mm)	B(mm)
10W	φ255	73
20W	φ330	78


订购信息:

产品描述	ENA10	EAN40
LDVAL CEILING 10W/830 230V 5X1 G3 LEDV	4058075234796	4058075234802
LDVAL CEILING 10W/840 230V 5X1 G3 LEDV	4058075234819	4058075234826
LDVAL CEILING 10W/865 230V 5X1 G3 LEDV	4058075234833	4058075234840
LDVAL CEILING IP44 10W/830 230V 5X1 LEDV	4058075234857	4058075234864
LDVAL CEILING IP44 10W/840 230V 5X1 LEDV	4058075234871	4058075234888
LDVAL CEILING IP44 10W/865 230V 5X1 LEDV	4058075234895	4058075234901
LDVAL CEILING 20W/830 230V 5X1 G3 LEDV	4058075234918	4058075234925
LDVAL CEILING 20W/840 230V 5X1 G3 LEDV	4058075234932	4058075234949
LDVAL CEILING 20W/865 230V 5X1 G3 LEDV	4058075234956	4058075234963

配光曲线:

Light output ratio: 100%
Luminaire luminous flux: 760 lm
Power: 10.0 W
Luminous efficacy: 76.0 lm/W


Luminous emittance 1 / Polar LDC

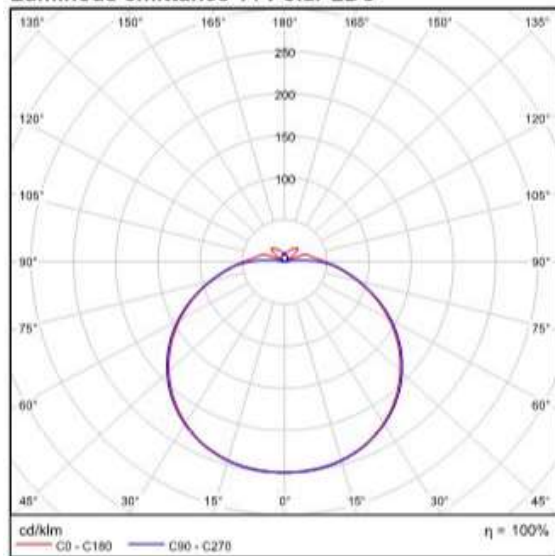

Ceiling 10W (IP20/IP44)

Light output ratio: 100%
Luminaire luminous flux: 1520 lm
Power: 20.0 W
Luminous efficacy: 76.0 lm/W

Luminous emittance 1 / Polar LDC

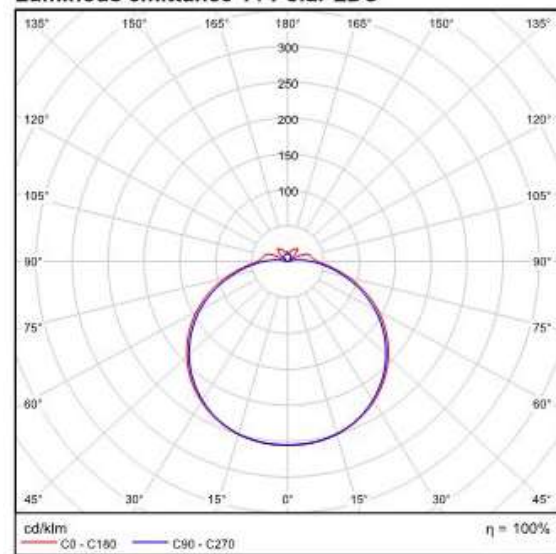

Ceiling 20W